

## Supplemental Information & Instructions for 904-171 & 904-172 FUEL LID, CHROME *Mazda Miata 1990-2005*

*(99-05 shown in photos. 90-97 similar process)*

1) Begin by popping open the stock fuel door and removing the gas cap temporarily. Locate the two retaining screws that attach the door hinge to the body as shown in Figure 1. Remove these screws using a Phillips screw driver or 8 mm socket. Store the screws with the original lid or reinstall in the original threaded holes.



Fig. 1 – Hinge Screws

2) Proceed to remove 3 of the 4 filler neck retaining screws as shown in Figure 2 using a Phillips screw driver or 8 mm socket. Store screws for use in next step.



Fig. 2 – Filler Neck (Front of car to the left)

3) Open the new lid and slide the base of the Moss Motors fuel door around the filler neck. Line up the holes in the base with the screw holes in the body as shown in Figure 2. Reinstall the screws from step 2 and reinstall the gas cap. Close the lid and test the function of the release handle with your new lid.

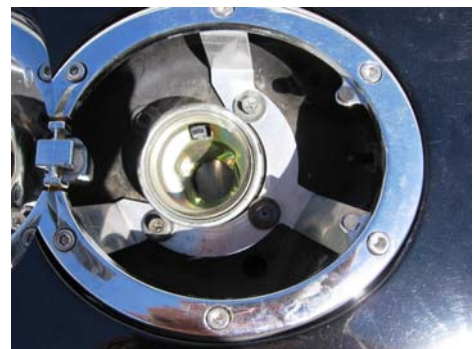


Fig. 3 – New Fuel Lid



**Moss Motors, Ltd.**

440 Rutherford Street, Goleta, California 93117  
In the US & Canada Toll Free (800) 667-7872 FAX (805) 692-2510 (805) 681-3400

**Moss Europe Ltd.**

Hampton Farm Industrial Estate, Hampton Road West, Hanworth Middlesex, TW13 6DB  
In the UK: 020-8867-2020 FAX:- 020-8867-2030