



Belt Line Molding Installation Instructions For 1990-2005 Mazda Miata

PART # 909-690, 909-691

440 Rutherford St. Goleta, CA 93117

1-800-667-7872 • FAX 805-692-2525 • www.mossmiata.com

Tools required:

Needle nose pliers
Pick or small screwdriver
Damp rags
Optional: Silicone and lithium grease spray

- 1) Open the door and roll the window down.



Illustration 1

- 2) Locate the small push-in fastener at the front and rear of the belt line molding. Remove them using needle nose pliers.



Illustration 2



Illustration 2 cont.

- 3) Examine the new molding to help you get a sense of how the clips work. Stand on the interior side of the door. Peel the molding up along the rear edge of the door until you can see the clip holding it to the door. Use a pick or a small screw driver to push the small tab in the middle of the clip. This will release the clip and molding from the door at the rear. Peel the molding back and push each tab working your way forward along the door. Once all the clips are free lift the molding from the door.



Illustration 3



Installation Instructions

- 4) Use a damp rag to clean the top of the door that was covered by the molding. Now is a good time to spray a little silicone on the rubber seals and weather stripping of the door. Also a good time to lube the window tracks and regulator with lithium grease.
- 5) Place the new molding along the door. Align the clips on the molding with the slot on the door. Make sure the clips are inserted in the slots before pushing down on the molding to lock them in place.

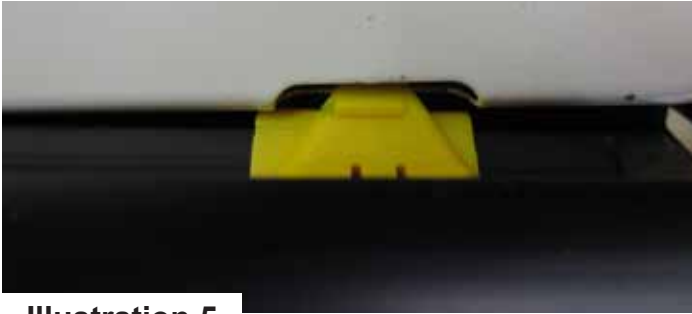


Illustration 5



- 6) Make sure to reinstall the push in fasteners to the front and rear of the molding. Enjoy your new parts and don't forget to see www.MossMiata.com for all your Miata needs!

Watch our install video at the MossMiata YouTube Channel or type this link into your browser:
<http://youtu.be/y9OooVpPpHY>