



TOURIST TROPHY®

# Vintage Luggage Rack

## Installation Instructions

### 2016+ Miata (ND) Soft Top Only

PART #: 910-995 Brushed Stainless Finish

PART #: 910-996 Powder Coat Black

#### Tools Required:

- 4mm Allen Wrench
- Tape Measure
- Painter's Tape or Crayon

**Note:** The trunk panel gaps are much tighter on the ND Miata than previous generations of Miata. Because of this, there is no room to put rubber protectors on the attaching brackets. We've included a set of clear plastic protectors but care must be taken on installation, and when closing the trunk to avoid scratching or chipping your car's paint. Close the lid gently and push it down to latch it. There is no need to slam it down.

#### Installation:

- 1) Install the rubber protectors to the bottom of the feet on the luggage rack.
- 2) Hook the corner of the tape measure on the forward corner of the trunk. Make temporary marks at 8 1/8" and 16 1/4" on the body of the car. Painter's tape, or crayon works well for this. Repeat for the other side.



Figure 2

- 3) Using the marks as a center point, peel and stick the clear paint protectors perpendicular to the edge of the trunk. Leave about 2" of extra past the edge of the trunk and curl it around underneath the trunk lid. You can trim the paint protectors with a razor blade or scissors to better fit around the curve of the rubber feet if desired. The smaller protector strips attach to the body underneath the trunk in case the attaching brackets should touch the paint when the trunk is closed.

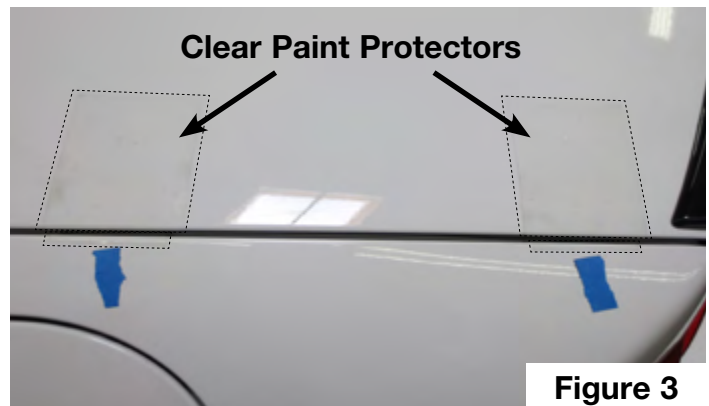


Figure 3

- 4) With the trunk partially open, set the luggage rack on top of the paint protector pads. Hook the attaching brackets under the trunk lid and thread the included screws finger tight. Ensure all brackets are parallel to the trunk edge, then tighten each bracket half a turn past finger tight with a 4mm Allen wrench.



Figure 4

# Installation Instructions

- 5) Check that the rack is firmly attached to the trunk lid by giving it a good tug. Tighten a little more only if necessary.


**Caution: Be careful not to overtighten as you can easily damage your car's paint. It doesn't need to be as tight as you may think.**



**Figure 5**

- 6) Carefully open your trunk and ensure you have clearance to the center brake light. Gently close the trunk and ensure the attaching brackets don't contact the body.
- 7) Re-check tightness of the bolts after a few uses.

Bill of Materials		
Ref	Part	Qty
A	Luggage rack (not pictured)	1
B	Clear protective adhesive strips	4
C	Hold-down brackets	4
D	Flat washers	4
E	Lock washers	4
F	Screws, M6 x 30 x 1.0mm	4
G	Rubber feet	4

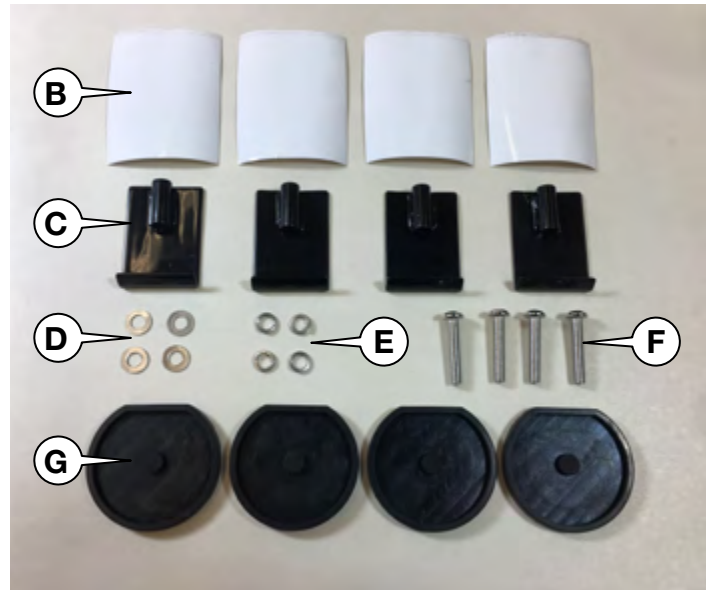

*Although every effort has been made to ensure the accuracy and clarity of this information, any suggestions that you may have that will improve the information (especially detailed installation notes and photos) are welcome. These instructions were developed and written by Moss Technical Support. If you have any questions or difficulties with your installation of this product, telephone 800-667-7872 between 7:00 a.m. and 4:00 p.m., Pacific Time for assistance.*

**Designed and Distributed by Moss Motors, Ltd.**

*For questions or comments please contact:*

**Moss Motors, Ltd.**  
 440 Rutherford Street, Goleta, California 93117  
 In the US & Canada Toll Free (800) 667-7872  
 LOCAL (805) 681-3400 FAX (805) 692-2510



**Moss Europe Ltd.**  
 Unit 16 Hampton Business Park Bolney Way  
 Feltham TW13 6DB, United Kingdom  
 In the UK: 020-8867-2020 FAX: 020-8867-2030